



7V Series Solenoid valve(5/2 way,5/3 way)

Compendium of 7V Series

Inner exhaust structure
Special structure in the valve body, which can collect pilot airflow, and then exhaust intensively from R, S port.

Terminal
Special design for terminal, horizontal and vertical insertion can freely switch.


Multi-series and type
7V0500, 7V100, 7V200 series are optional; one series have single solenoid 5/2 way(10) , double solenoid 5/2 way (20) , double solenoid 5/3 way (30C, 30E, 30P) are optional.

Multi-port types are optional
Threaded type and quick connector type are optional, and can integrate manifold to form valve group to save space.



Die-cast molding with aluminum alloy for body
The shape of cavity is reasonable, which can increase flowing area and valve's flow.

Installation and Application


1. Don't throw or drop the solenoid valve when take it, to avoid breaking valve;
2. Because solenoid pilot valve is sophisticated component, can't crash pilot valve by outside force, otherwise solenoid valve break possibly;
3. Don't dismantle solenoid valve freely, if the screw(M1.6X14) becomes loose, please tighten it by torque 0.1~0.12N.m;
4. About manual operation:
 - 4.1. Ensure no danger, prior to activating manual override;
 - 4.2. For push button option:
Activate by push the button in the direction shown
 - 4.3. For slotted option:
Activate by push the button in the direction shown.
With correct size screw driver: please turn to lock gently(Torque: 0.1N.m).



Attention

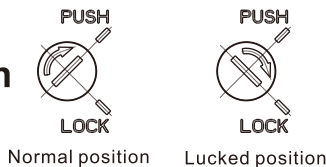

- 4.4. Wiring instruction: Vertical plug type and parallel plug type are the same as plug, please insert wire line as up drawing by practicality.



Vertical plug wire



Parallel plug wire



Solenoid valve(5/2 way,5/3 way)


7V Series



Specification

Model	7V0510,7V0520	7V0530	7V110	7V120	7V130
Port size [Note1]	In=Out=Exhaust=M5		In=Out=Exhaust=1/8"		
	Thread type		Tube type		
	Port A=Port B=Φ4		Port A=Port B=Φ4(or Φ6or Φ8)		
Orifice size (Cv value)	5.0mm ² (0.28)	4.5mm ² (0.25)	9.5mm ² (0.55)	8.0mm ² (0.48)	
Weight	30g	45g	50g	80g	90g
	100g				
Model	7V210	7V220	7V230		
Port size [Note1]	In=Out=1/4" Exhaust=1/8"		Port A=Port B=Φ8(or Φ10)		
	Thread type		Tube type		
Orifice size (Cv value)	14.0mm ² (0.83)		11.0mm ² (0.61)		
Weight	120g	135g	145g		
Fluid	Air(to be filtered by 40μm filter element)				
Acting	Pilot				
Operating pressure	7V0530/7V130/7V230		0.2~0.8MPa(29~114psi)		
	Othres		0.15~0.8MPa(21~114psi)		
Proof pressure	1.2MPa(175psi)				
Temperature	-20~70°C				
Material of body	Aluminum alloy				
Lubrication [Note2]	Not required				
Exhaust type of pilot valve	Main valve and pilot valve is centralized exhaust				
Max. frequency [Note3]	5 cycle/sec	3 cycle/sec	5 cycle/sec	3 cycle/sec	

Symbol

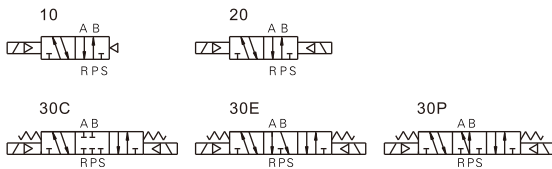

Product feature

1. Electrical entry is terminal, horizontal and vertical insertion can freely switch.
2. Inner exhaust structure, which can collect pilot airflow, and then exhaust intensively from R, S port.
3. Die-cast molding with aluminum alloy for body. The shape of cavity is reasonable, which can increase valve's flow.
4. Threaded type and quick connector type are optional, and can integrate manifold to form valve group to save space.

Coil specification

Item	Specification			
Standard voltage	AC220V	AC110V	DC24V	DC12V
Scrop of voltage	AC: +15% ~ -10%		DC: ±10%	
Power of consumption	1.1VA		0.9W	
Protection	Dustproof			
Temperature classification	F Class			
Electrical entry	Terminal			
Activating time	0.05 sec and below			

[Note1] PT, NPT thread and G thread are available.
 [Note2] Once lubricated air is used, continue with same medium to optimize valve life span. Lubricants like ISO VG32 or equivalent are recommended.
 [Note3] The maximum actuation frequency is in the no-load state.

Ordering code




7V 2 10 J 08 B 050 □



① Model	7V: 5 port 2(3) position solenoid valve		
② Code	05: 0500 Series	1: 100 Series	2: 200 Series
③ Valve type	10: Single solenoid(5/2 Way)	20: Double solenoid(5/2 Way)	30C: Double solenoid(5/3 way closed center)
	30E: Double solenoid(5/3 way Exhaust center)	30P: Double solenoid(5/3 way pressure center)	
④ Port type	Blank: Thread type J: Tube type		
⑤ Port size	Thread type		06: 1/8"
	M5: M5	08: 1/4"	
⑥ Voltage	04: Φ4mm		
	04: Φ4mm/06: Φ6mm/08: Φ8mm	08: Φ8mm/10: Φ10mm	
⑦ Line's length	A: AC220V	B: DC24V	C: AC110V F: DC12V
⑧ Thread type	050: 0.5m 200: 2.0m		
	No this code	Blank: PT thread	G: G Thread T: NPT Thread

[Note 1]: The bottom ports of solenoid valve with tube type are oval, without tread type options and can only install with a manifold.


Flow chart

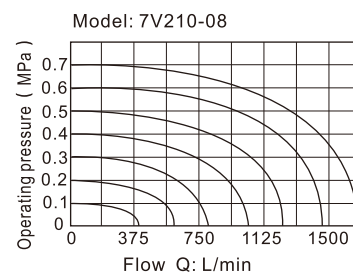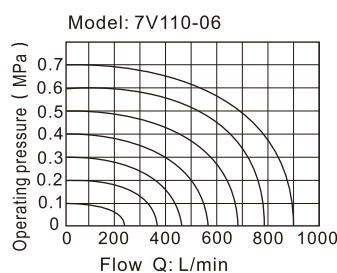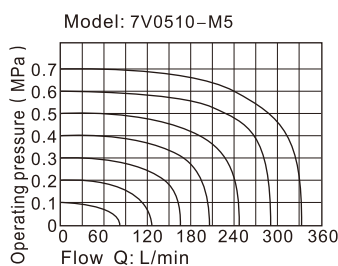

Solenoid valve(5/2 way,5/3 way)

7V Series


Inner structure

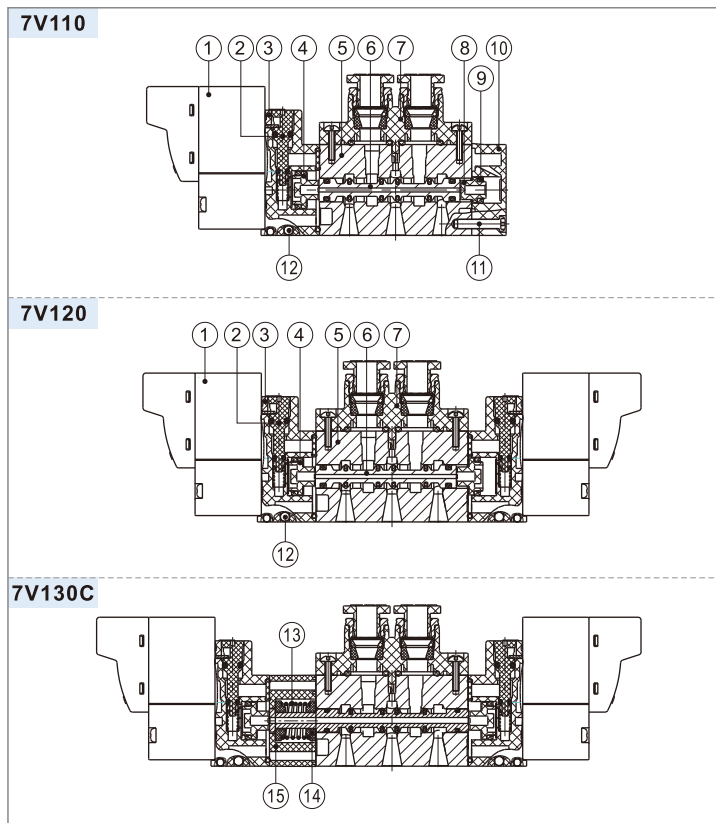

No.	Item	No.	Item	No.	Item
1	Pilot valve	6	Spool	11	Bolt
2	Manual override	7	Connecting block	12	Steel ball
3	Pilot kit	8	Little piston	13	Spring
4	Big piston	9	Gasket	14	Return holder
5	Body	10	Bottom cover	15	Side cover

Dimensions

7V0510
7V110
7V210

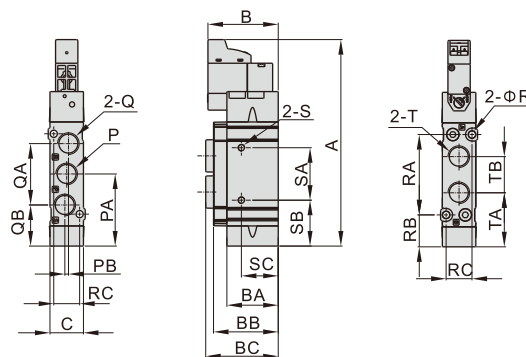


Model\Item	A	B	BA	BB	BC	C	P	PA	PB	Q	QA	QB	T	TA	TB	R	RA	RB	RC	S	SA	SB	SC
7V0510M5	73	30.5	18.5	23	23.5	10	M5X0.8	22.5	1	M5X0.8	19	13	M5X0.8	17.5	10.5	2.1	21.4	12	8.6	M3X0.5dp3	9.5	17.8	4
7V0510J04					32.5		Oval			Oval			Φ4(tube)							-	-	-	-
7V11006					32.5		1/8"			1/8"			1/8"							M3X0.5dp3	23.5	20.5	16.5
7V110J04	92.5	32	23	29	38.2	15	Oval	32.5	1.6	Oval	27.2	18.5	Φ4(tube)	24	16.2	3.2	36	14.5	11.6	-	-	-	-
40					Φ6(tube)																		
41.5					Φ8(tube)																		
7V21008	106	33.5	28	34	40.5	18	1/4"	39	3	1/8"	36	21	1/4"	29	20	4.3	42	18	13.6	M4X0.7dp5	20	29	7
46.5					Φ8(tube)		-			-			-										
49					Φ10(tube)		-			-			-										

[Note]: The bottom of solenoid valve with tube type are oval port and can only install with manifold (no side installation hole "S").

Solenoid valve(5/2 way,5/3 way)

7V Series


7V0520
7V120
7V220

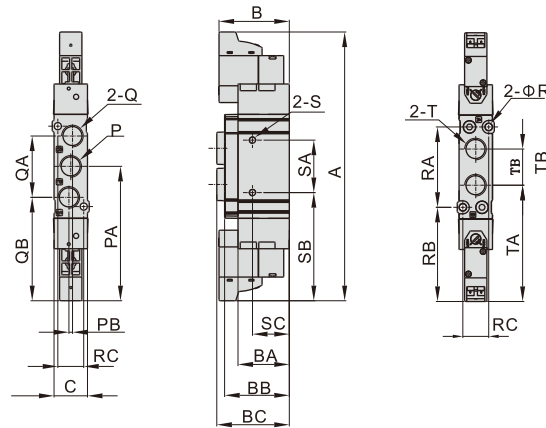

Model\Item	A	B	BA	BB	BC	C	P	PA	PB	Q	QA	QB	T	TA	TB	R	RA	RB	RC	S	SA	SB	SC	
7V0520M5	101.5	30.5	18.5	23	23.5	10	M5X0.8	50.5	1	M5X0.8	19	41	M5X0.8	45.5	10.5	2.1	21.4	12	8.6	M3X0.5dp3	9.5	17.8	4	
7V0520J04					32.5		Oval			Φ4(tube)			-							-				-
7V12006					32.5		1/8"			1/8"			M3X0.5dp3							23.5				48.5
7V120J04	120.5	32	23	29	38.2	15	Oval	60.5	1.6	Oval	27.2	46.5	Φ4(tube)	52	16.2	3.2	36	14.5	11.6	-	-	-	-	
7V120J06					40								Φ6(tube)							-	-	-		
7V120J08					41.5								Φ8(tube)							-	-	-		
7V22008					40.5								1/4"							1/8"	1/4"	M4X0.7dp5	20	57
7V220J08	134	33.5	28	34	46.5	18	Oval	67	3	Oval	36	49	Φ8(tube)	57	20	4.3	42	18	13.6	-	-	-	-	
7V22008J10					49								Φ10(tube)							-	-	-		

[Note]: The bottom of solenoid valve with tube type are oval port and can only install with manifold (no side installation hole "S").

7V0530
7V130
7V230

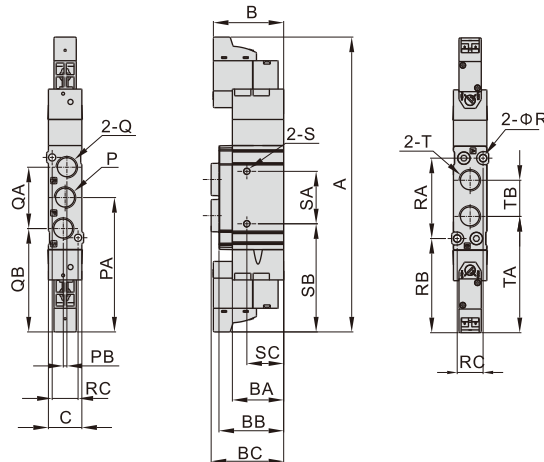

Model\Item	A	B	BA	BB	BC	C	P	PA	PB	Q	QA	QB	T	TA	TB	R	RA	RB	RC	S	SA	SB	SC	
7V0530M5	110	30.5	18.5	23	23.5	10	M5X0.8	50.5	1	M5X0.8	19	41	M5X0.8	45.5	10.5	2.1	21.4	12	8.6	M3X0.5dp3	9.5	45.8	4	
7V0530J04					32.5		Oval			Φ4(tube)			-							-				-
7V13006					32.5		1/8"			1/8"			M3X0.5dp3							23.5				48.5
7V130J04	132	32	23	29	38.2	15	Oval	60.5	1.6	Oval	27.2	46.5	Φ4(tube)	52	16.2	3.2	36	14.5	11.6	-	-	-	-	
7V130J06					40								Φ6(tube)							-	-	-		
7V130J08					41.5								Φ8(tube)							-	-	-		
7V23008					40.5								1/4"							1/8"	1/4"	M4X0.7dp5	20	57
7V230J08	147	33.5	28	34	46.5	18	Oval	67	3	Oval	36	49	Φ8(tube)	57	20	4.3	42	18	13.6	-	-	-	-	
7V230J10					49								Φ10(tube)							-	-	-		

[Note]: The bottom of solenoid valve with tube type are oval port and can only install with manifold (no side installation hole "S").

7V Series manifold



Specification

Item\Manifold Model	7V0500M	7V100M	7V200M
Fluid	Air(to be filtered by 40 μm filter element)		
Temperature	-20~70°C		
Adaptable valve's series	7V0500 Series	7V100 Series	7V200 Series

Product feature

1. It is available to integrate the direction control valves of the same series to form valve group to save space and cost.
2. It is easy to examine when there are faults owing to the unified air intake and exhaust and unified wiring.
3. Flexible combination and strong expansion capability can make any combination or expansion of the numbers of direction control valves that are connected.

Ordering code

7V100M 5F T Ordering code for manifold



① Model	7V0500M: 7V0500 Series manifold	7V100M: 7V100 Series manifold	7V200M: 7V200 Series manifold
② Number of stations	1F: 1 Station 2F: 2 Station 3F: 3 Station 20F: 20 Station		
③ Thread type	Blank: PT thread G: G Thread T: NPT Thread		


P-7V100M-R2 Ordering code for blank plate



① Model	7V0500M: 7V0500 Series manifold	7V100M: 7V100 Series manifold	7V200M: 7V200 Series manifold
② Code	R2: Blank plate for manifold		

[Note] 1. Manifold kits contains manifold, seal and screw. 2. Blank plate kits contains blank plate and screw.

Dimensions

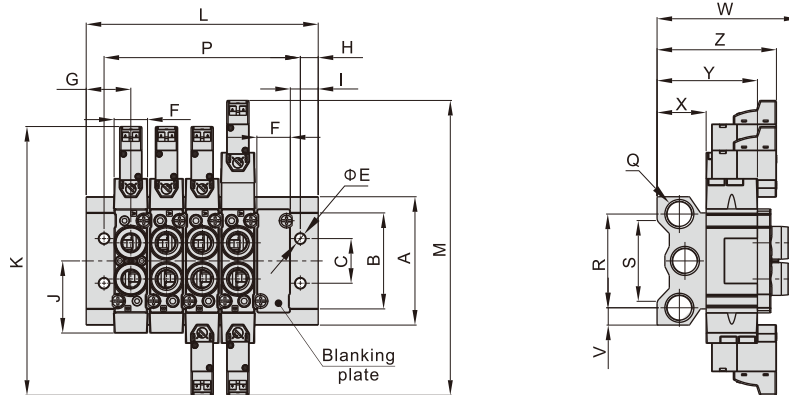

Model\Item	A	B	C	E	F	G	H	I	J	K	M	Q	R	S	V	W		X	Y	Z
7V0500M	46	32	16	4.5	10	17.5	7.5	12.5	22.5	102	110	1/8"	32	26	7	40.5(M5) 49.5(J04)		17	35.5	47.5
7V100M	57.5	43	20	4.5	15	20	8	12.5	32	121	132	1/4"	40	36	9	54.5(O6) 62(J06) 63.5(J08)		22	45	53.5
7V200M	60	52	21	4.5	18	22	8.5	13	39	134	147	1/4"	42	38	9	64.5(O8) 70.5(J08) 73(J10)		24	52	57

Model\Item	L																			
	1F	2F	3F	4F	5F	6F	7F	8F	9F	10F	11F	12F	13F	14F	15F	16F	17F	18F	19F	20F
7V0500M	35	40.5	51	61.5	72	82.5	93	103.5	114	124.5	135	145.5	156	166.5	177	187.5	198	208.5	219	229.5
7V100M	40	50	66	82	98	114	130	146	162	178	194	210	226	242	258	247	290	306	322	338
7V200M	44	56	75	94	113	132	151	170	189	208	227	246	265	284	303	322	341	360	379	398

Model\Item	P																			
	1F	2F	3F	4F	5F	6F	7F	8F	9F	10F	11F	12F	13F	14F	15F	16F	17F	18F	19F	20F
7V0500M	20	30.5	41	51.5	62	72.5	83	93.5	104	114.5	125	135.5	146	156.5	167	177.5	188	198.5	209	219.5
7V100M	24	40	56	72	88	104	120	136	152	168	184	200	216	232	248	264	280	296	312	328
7V200M	27	46	65	84	103	122	141	160	179	198	217	236	255	274	293	312	331	350	369	388