




CA TYPE SMALL FLOW QUICK COUPLING









Major Applicable Fluid~

Stainless Steel: Frozen Lubricant/Acid/Brine

Brass: Oil/Fresh Water/Air

Steel: Circulating Lubricant/Fresh Water/Air

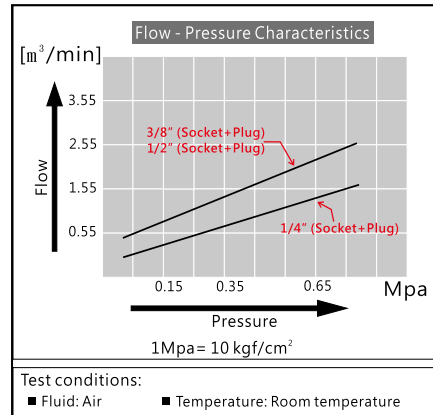

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS A2335CAJA BRASS A0135CAJA SS41 A1135CAJA	20SH	66.5	25	Ø24*6HEX*21D	25	7.2	3.5	92	100	93	240-B
	25SH	71.5	25	Ø24*6HEX*21D	30	9	5	95	103	96	240-B
	30SH	71.5	25	Ø24*6HEX*21D	30	11.3	7.3	96	104	97	240-B
	40SH	73.5	25	Ø24*6HEX*21D	32	15	9	109	118	110	240-B

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS A2335CAJA BRASS A0135CAJA SS41 A1135CAJA	10SF	49.5	25	Ø24*6HEX*21D	12	PT1/8"28P	8	100	109	102	240-B
	20SF	52.5	25	Ø24*6HEX*21D	15	PT1/4"19P	8	100	108	101	240-B
	30SF	53.5	25	Ø24*6HEX*21D	16	PT3/8"19P	11	102	111	104	240-B
	40SF	54.5	25	Ø24*6HEX*21D	17	PT1/2"14P	11	121	131	122	240-B

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS A2335CAJA BRASS A0135CAJA SS41 A1135CAJA	10SM	50.5	25	Ø24*6HEX*21D	9	PT1/8"28P	5	88	95	89	240-B
	20SM	53.5	25	Ø24*6HEX*21D	12	PT1/4"19P	8	90	98	91	240-B
	30SM	54.5	25	Ø24*6HEX*21D	13	PT3/8"19P	11	94	102	95	240-B
	40SM	55.5	25	Ø24*6HEX*21D	14	PT1/2"14P	13.5	103	112	104	240-B

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS A2335CAJA BRASS A0135CAJA SS41 A1135CAJA	20SP	53	25	Ø24*6HEX*21D	11.5	4*6	3	95	103	96	240-B
	25SP	54.5	25	Ø24*6HEX*21D	13	5*8	4	99	107	100	240-B
	30SP	57	25	Ø24*6HEX*21D	15.5	6.5*10	5	105	114	106	240-B
	40SP	58.5	25	Ø24*6HEX*21D	17	8*12	6.5	110	119	111	240-B

Computer No	Product Sign	Dimension (mm)				Weight (g)			Quantity per Carton
		Ls	D	Cs	T	SS41	BRASS	SUS	
SUS A2335CAJA BRASS A0135CAJA SS41 A1135CAJA	04SC	50.8	25	Ø24*6HEX*21D	4MM(OD)	88	95.5	89	240-B
	06SC	51	25	Ø24*6HEX*21D	6MM(OD)	87	94.5	88	240-B
	08SC	51	25	Ø24*6HEX*21D	8MM(OD)	86.2	93.5	87.2	240-B
	10SC	53.3	25	Ø24*6HEX*21D	10MM(OD)	87.5	95	88.6	240-B
	12SC	56.4	25	Ø24*6HEX*21D	12MM(OD)	89	96.5	90	240-B

- Max. pressure: 10Kg/cm²
- Operating temp. range: A2335CAJA=VITON -20°C ~ +180°C
- Uses: Pneumatic pressure hose, Pneumatic tools, Air pressure machine, Automatic assembly machine.
- Brass mark: A0135CAJA > -20°C ~ +80°C
- Steel mark: A1135CAJA
- Special seal(Packing) temperature range: -50°C ~ +300°C

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)

CA TYPE SMALL FLOW QUICK COUPLING









Major Applicable Fluid~

Stainless Steel: Frozen Lubricant/Acid/Brine

Brass: Oil/Fresh Water/Air

Steel: Circulating Lubricant/Fresh Water/Air

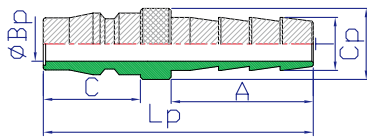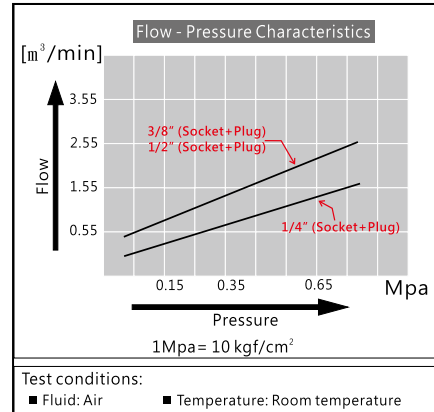

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Lp	C	Cp	A	T	Bp	SS41	BRASS	SUS	
SUS A2335CAJA	20PH	52	20.5	15	25	7.2	7	24	26	24	480-B
	25PH	57	20.5	15	30	9	7	28	30	28	480-B
A0135CAJA	30PH	57	20.5	15	30	11.3	7	29	31	29	480-B
A1135CAJA	40PH	59	20.5	18	32	15	7	45	49	46	480-B

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Lp	C	Cp	A	T	Bp	SS41	BRASS	SUS	
SUS A2335CAJA	10PF	34.5	20.5	Ø16*6HEX*14D	12	PT1/8"28P	7	36	39	36	480-B
	20PF	37.5	20.5	Ø19.5*6HEX*17D	15	PT1/4"19P	7	30	33	31	480-B
A0135CAJA	30PF	37.5	20.5	Ø24*6HEX*21D	15	PT3/8"19P	7	40	43	40	480-B
A1135CAJA	40PF	38.5	20.5	Ø30*6HEX*26D	16	PT1/2"14P	7	55	60	56	480-B

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Lp	C	Cp	A	T	Bp	SS41	BRASS	SUS	
SUS A2335CAJA	10PM	37	20.5	Ø16*6HEX*14D	10	PT1/8"28P	7	22	24	22	480-B
	20PM	40	20.5	Ø16*6HEX*14D	13	PT1/4"19P	7	25	27	25	480-B
A0135CAJA	30PM	40	20.5	Ø19.5*6HEX*17D	13	PT3/8"19P	7	30	33	31	480-B
A1135CAJA	40PM	44	20.5	Ø24*6HEX*21D	15	PT1/2"14P	7	49	53	49	480-B

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Lp	C	Cp	A	T	Bp	SS41	BRASS	SUS	
SUS A2335CAJA	20PP	38.5	20.5	Ø16*6HEX*14D	11.5	4*6	7	25	27	25	480-B
	25PP	38	20.5	Ø16*6HEX*14D	13	5*8	7	29	32	30	480-B
A0135CAJA	30PP	42.5	20.5	Ø17*6HEX*17D	15.5	6.5*10	7	32	35	33	480-B
A1135CAJA	40PP	42.5	20.5	Ø19.5*6HEX*17D	17	8*12	7	43	47	44	480-B

Computer No	Product Sign	Dimension (mm)				Weight (g)			Quantity per Carton
		Lp	C	Cp	T	SS41	BRASS	SUS	
SUS A2335CAJA	04PC	38.6	20.5	Ø16*6HEX*14D	4MM(OD)	26.7	29	27	480-B
	06PC	35.6	20.5	Ø16*6HEX*14D	6MM(OD)	21.7	23.5	22	480-B
A0135CAJA	08PC	35.2	20.5	Ø16*6HEX*14D	8MM(OD)	18.4	20	19	480-B
A1135CAJA	10PC	36	20.5	Ø20*6HEX*17D	10MM(OD)	20.7	22.5	21	480-B
	12PC	44.3	20.5	Ø21.7*6HEX*19D	12MM(OD)	34.5	37.5	35	480-B

- Max. pressure: 10Kg/cm²
- Operating temp. range: A2335CAJA=VITON -20°C ~ +180°C
- Uses: Pneumatic pressure hose, Pneumatic tools, Air pressure machine, Automatic assembly machine.
- Brass mark: A0135CAJA > -20°C ~ +80°C
- Steel mark: A1135CAJA
- Special seal(Packing) temperature range: -50°C ~ +300°C

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)