





FB TYPE DOUBLE SHUT-OFF QUICK COUPLING FOR JACK USE (AMERICAN STANDARD)

Major Applicable Fluid~
Carbon Steel: Frozen Lubricant/Fresh Water/
Operation Lubricant/Gas/Air/Vacuum

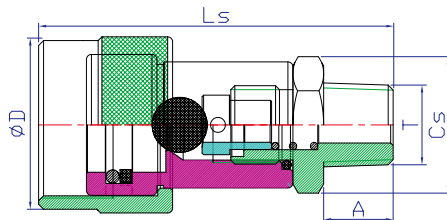

Computer No	Product Sign	Dimension (mm)					Weight (g)	Quantity per Carton
		Ls	D	Cs	A	T		
A8105FBUA	03SM	72	35.5	Ø29.8*6HEX*26D	14.3	NPT3/8"18P	223	50-A




Computer No	Product Sign	Dimension (mm)						Weight (g)	Quantity per Carton
		Lp	C	Cp	A	T	T1		
A8105FBUA	03PF	40	16	Ø35.5*6HEX*32D	17.1	NPT3/8"18P	1-3/16"16P	142	50-A

FEATURES

1. High pressure double shut-off valve designed. Valve is composed of socket and plug.
2. Suitable connect with high-pressure air hoses and hydraulic equipments.
3. Material: Carbon steel.

NOTICES

- Dash size of socket & plug must be equal for connecting.
- To avoid feculence drops into coupler & sticks on seal is very important. It may be cause leak.

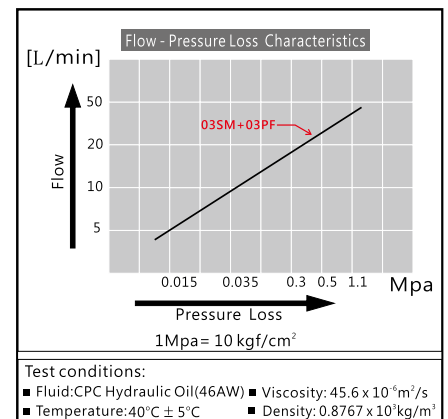

Coupling Releasing



Coupling Fitting



Max. pressure: Kg/cm² 03SM+03PF
1000

Operating temp. range: -20°C ~ +80°C (NBR) -20°C ~ +180°C (VITON)

Special seal(Packing) temperature range: -50°C ~ +300°C

Uses: Hydraulic machine, Hydraulic hand tools and etc. (Suitable non-corrosion fluid)

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)