




MT TYPE (ONE-HAND QUICK COUPLING)

Major Applicable Fluid~


Stainless Steel: Frozen Lubricant/Acid/Brine

Brass: Oil/Fresh Water/Air


Steel: Circulating Lubricant/Fresh Water/Air

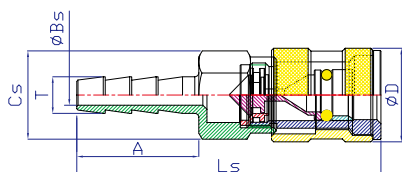


Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS A2335MTMA BRASS A0135MTMA SS41 A1135MTMA	15SH	67.8	23	Ø21.7*6HEX*19D	23	5.5	3				240-B
	20SH	69.8	23	Ø21.7*6HEX*19D	25	7.2	4	84.8	92	85.8	240-B
	25SH	74.8	23	Ø21.7*6HEX*19D	30	9	5	89.4	97	90.5	240-B
	30SH	74.8	23	Ø21.7*6HEX*19D	30	11.3	7.3	91.2	99	92.4	240-B
	40SH	76.8	23	Ø21.7*6HEX*19D	32	15	9	105	114	106.3	240-B

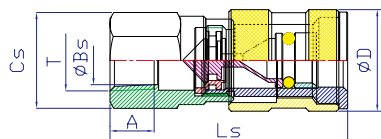

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS A2335MTMA BRASS A0135MTMA SS41 A1135MTMA	10SF	53.8	23	Ø21.7*6HEX*19D	10	PT1/8"28P	9.7	96.8	105	98	240-B
	20SF	53.8	23	Ø21.7*6HEX*19D	10	PT1/4"19P	11	93.1	101	94.2	240-B
	30SF	53.8	23	Ø24.1*6HEX*21D	13	PT3/8"19P	13.5	95.4	103.5	96.6	240-B
	40SF	53.8	23	Ø29.8*6HEX*26D	13	PT1/2"14P	13.5	108.7	118	110.1	240-B

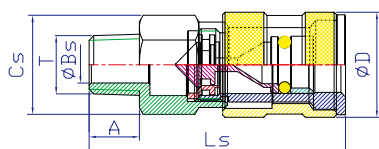

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS A2335MTMA BRASS A0135MTMA SS41 A1135MTMA	10SM	55.1	23	Ø21.7*6HEX*19D	10	PT1/8"28P	5.5	83.8	91	84.9	240-B
	20SM	56.1	23	Ø21.7*6HEX*19D	11	PT1/4"19P	8	87.1	94.5	88.2	240-B
	30SM	56.1	23	Ø21.7*6HEX*19D	11	PT3/8"19P	10.5	87.1	94.5	88.2	240-B
	40SM	58.1	23	Ø24.6*6HEX*21D	13	PT1/2"14P	13.5	102.3	111	103.6	240-B

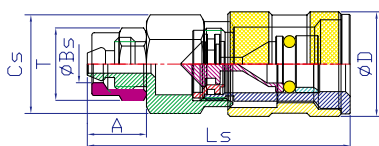

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS A2335MTMA BRASS A0135MTMA SS41 A1135MTMA	20SP	56.3	23	Ø21.7*6HEX*19D	11.5	4*6	6.6	86.6	94	87.7	240-B
	25SP	57.8	23	Ø21.7*6HEX*19D	13	5*8	8.2	92.6	100.5	93.8	240-B
	30SP	60.3	23	Ø21.7*6HEX*19D	15	6.5*10	10.2	95.4	103.5	96.6	240-B
	40SP	60.3	23	Ø21.7*6HEX*19D	15.5	8*12	12.2	103.7	112.5	104.9	240-B

- Max. pressure: 10Kg/cm²
- Operating temp. range: A2335MTMA=VITON -20°C ~ +180°C
- Uses: Pneumatic pressure hose, Pneumatic tools, Air pressure machine, Automatic assembly machine.
- Brass mark: A0135MTMA
- Steel mark: A1135MTMA
- Special seal(Packing) temperature range: -50°C ~ +300°C

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)


MT TYPE (ONE-HAND QUICK COUPLING)

Major Applicable Fluid~


Stainless Steel: Frozen Lubricant/Acid/Brine

Brass: Oil/Fresh Water/Air


Steel: Circulating Lubricant/Fresh Water/Air

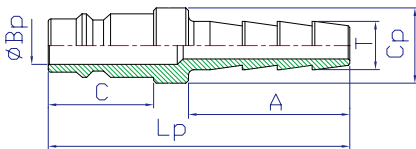


Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Lp	C	Cp	A	T	Bp	SS41	BRASS	SUS	
SUS A2335MTMA	15PH	49	19.6	14	23	5.5	7	17	18.5	17.2	480-B
	20PH	51	19.6	14	25	7.2	7	18.4	20	18.6	480-B
BRASS A0135MTMA	25PH	56	19.6	14	30	9	7	22.1	24	22.4	480-B
SS41	30PH	56	19.6	16	30	11.3	7	26.7	29	27.1	480-B
A1135MTMA	40PH	58	19.6	18	32	15	7	42.4	46	42.9	480-B



Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Lp	C	Cp	A	T	Bp	SS41	BRASS	SUS	
SUS A2335MTMA	20PF	37.6	19.6	Ø21.7*6HEX*19D	15	PT1/4"19P	7	37.8	41	38.2	480-B
BRASS A0135MTMA	30PF	38.6	19.6	Ø24*6HEX*21D	15	PT3/8"19P	7	41.5	45	42	480-B
SS41 A1135MTMA	40PF	40.6	19.6	Ø30*6HEX*26D	17	PT1/2"14P	7	62.2	67.5	63	480-B



Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Lp	C	Cp	A	T	Bp	SS41	BRASS	SUS	
SUS A2335MTMA	10PM	36	19.6	Ø16*6HEX*14D	10	PT1/8"28P	7	16.6	18	16.8	480-B
BRASS A0135MTMA	20PM	37.6	19.6	Ø16*6HEX*14D	11.5	PT1/4"19P	7	20.7	22.5	21	480-B
SS41 A1135MTMA	30PM	39.2	19.6	Ø19.5*6HEX*17D	12.5	PT3/8"19P	7	27.2	29.5	27.5	480-B
	40PM	42.6	19.6	Ø24*6HEX*21D	14	PT1/2"14P	7	44.7	48.5	45.2	480-B

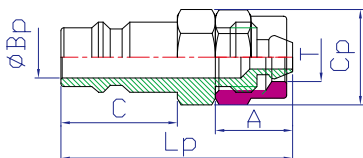

Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Lp	C	Cp	A	T	Bp	SS41	BRASS	SUS	
SUS A2335MTMA	20PP	37.5	19.6	Ø16*6HEX*14D	11.5	4*6	7	20.7	22.5	21	480-B
BRASS A0135MTMA	25PP	39	19.6	Ø16*6HEX*14D	13	5*8	7	26.3	28.5	26.6	480-B
SS41 A1135MTMA	30PP	41	19.6	Ø16*6HEX*14D	15	6.5*10	7	29.5	32	29.9	480-B
	40PP	42	19.6	Ø21.7*6HEX*19D	15.4	8*12	7	44.7	48.5	45.2	480-B

Max. pressure: 10Kg/cm² Brass mark: A0135MTMA > -20°C ~ +80°C
 Operating temp. range: A2335MTMA=VITON -20°C ~ +180°C Steel mark: A1135MTMA
 Uses: Pneumatic pressure hose, Pneumatic tools, Special seal(Packing) temperature range: -50°C ~ +300°C
 Air pressure machine, Automatic assembly machine.

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)