



SA TYPE (ONE-HAND QUICK COUPLING)

Major Applicable Fluid~


Stainless Steel: Frozen Lubricant/Acid/Brine

Brass: Oil/Fresh Water/Air


Steel: Circulating Lubricant/Fresh Water/Air




Single Shut-off

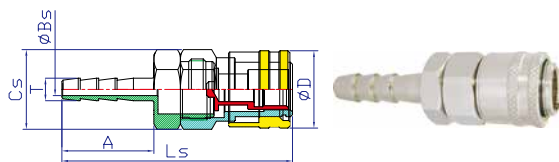


Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS A2335SAJA BRASS A0135SAJA SS41 A1135SAJA	15SH	56.4	18.9	Ø19.5*6HEX*17D	22.5	5.5	3	44.1	44.5	41.6	400-B
	20SH	58.4	18.9	Ø19.5*6HEX*17D	25	7.2	4	41.6	45	42.1	400-B
	25SH	58.4	18.9	Ø19.5*6HEX*17D	25	9	6.2	44.3	48	44.9	400-B
	30SH	58.9	18.9	Ø19.5*6HEX*17D	25.5	11.3	7	47.1	51	47.7	400-B
40SH	65.4	18.9	Ø21.7*6HEX*19D	32	15	9	55.9	60.5	56.5	400-B	




Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS A2335SAJA BRASS A0135SAJA SS41 A1135SAJA	10SF	42.7	18.9	Ø18.2*6HEX*16D	9	PT1/8"28P	8	49.4	53.5	50	400-B
	20SF	43.4	18.9	Ø19.5*6HEX*17D	9	PT1/4"19P	9	48.9	53	49.5	400-B
	30SF	45.4	18.9	Ø21.7*6HEX*19D	11.7	PT3/8"19P	9	52.2	56.5	52.8	400-B




Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS A2335SAJA BRASS A0135SAJA SS41 A1135SAJA	10SM	43.4	18.9	Ø19.5*6HEX*17D	9.2	PT1/8"28P	6.2	40.2	43.5	40.7	400-B
	20SM	44.4	18.9	Ø19.5*6HEX*17D	11	PT1/4"19P	7	46.6	50.5	47.2	400-B
	30SM	44.4	18.9	Ø19.5*6HEX*17D	11	PT3/8"19P	9	48.5	52.5	49.1	400-B
	40SM	46.4	18.9	Ø24*6HEX*21D	13	PT1/2"14P	14	59.1	64	59.8	400-B




Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS A2335SAJA BRASS A0135SAJA SS41 A1135SAJA	10SMS	43.4	18.9	Ø19.5*6HEX*17D	10	PS1/8"28P	5	40.7	44	41.1	400-B
	20SMS	43.4	18.9	Ø19.5*6HEX*17D	10	PS1/4"19P	8.1	42	45.5	42.5	400-B
	30SMS	43.4	18.9	Ø19.5*6HEX*17D	10	PS3/8"19P	11.5	43	46.5	43.5	400-B
	40SMS	46.4	18.9	Ø24*6HEX*21D	13	PS1/2"14P	12.4	59.1	64	59.8	400-B



Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS A2335SAJA BRASS A0135SAJA SS41 A1135SAJA	20SP	45.7	18.9	Ø19.5*6HEX*17D	11.5	4*6	6.6	45.7	49.5	46.3	400-B
	25SP	47.2	18.9	Ø19.5*6HEX*17D	13	5*8	8.2	49.9	54	50.5	400-B
	30SP	49.7	18.9	Ø19.5*6HEX*17D	15.5	6.5*10	10.2	52.2	56.5	52.8	400-B



Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS A2335SAJA BRASS A0135SAJA SS41 A1135SAJA	20SG	46.7	18.9	Ø19.5*6HEX*17D	13.3	7/16"20P	5	43	46.5	43.5	400-B
	30SG	48.4	18.9	Ø19.5*6HEX*17D	15	9/16"18P	8	46.2	50	46.7	400-B
	40SG	49.9	18.9	Ø21.7*6HEX*19D	16.5	3/4"16P	10	58.2	63	58.9	400-B



Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Ls	D	Cs	A	T	Bs	SS41	BRASS	SUS	
SUS A2335SAJA BRASS A0135SAJA SS41 A1135SAJA	10SAP	53.9	18.9	Ø19.5*6HEX*17D	20.5	13	7	49.4	53.5	49.8	400-B

- Max. pressure: 10Kg/cm²
- Operating temp. range: A2335SAJA=VITON -20°C ~ +180°C
- Uses: Pneumatic pressure hose, Pneumatic tools, Air pressure machine, Automatic assembly machine.
- Brass mark: A0135SAJA > -20°C ~ +80°C
- Steel mark: A1135SAJA > -20°C ~ +80°C
- Special seal(Packing) temperature range: -50°C ~ +300°C

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)


SA TYPE (ONE-HAND QUICK COUPLING)

Major Applicable Fluid~


Stainless Steel: Frozen Lubricant/Acid/Brine

Brass: Oil/Fresh Water/Air


Steel: Circulating Lubricant/Fresh Water/Air

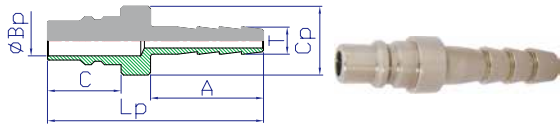


Computer No	Product Sign	Dimension (mm)						Weight (g)			Quantity per Carton
		Lp	C	Cp	A	T	Bp	SS41	BRASS	SUS	
SUS A2335SAJA BRASS A0135SAJA SS41 A1135SAJA	15PH	44	15	14	23	5.5	6.2	9.6	10.5	9.7	500-B
	20PH	46	15	14	25	7.2	6.2	13.3	14.5	13.5	500-B
	25PH	46	15	14	25	9	6.2	13.9	15.1	14	500-B
	30PH	46	15	14	25	11.3	6.2	20.2	22	20.5	500-B
	40PH	53	15	20	32	15	6.2	23.9	26	24.2	500-B




Computer No	Product Sign	Dimension (mm)					Weight (g)			Quantity per Carton	
		Lp	C	Cp	A	T	Bp	SS41	BRASS		SUS
SUS A2335SAJA BRASS A0135SAJA SS41 A1135SAJA	10PF	28	15	Ø16*6HEX*14D	10.5	PT1/8"28P	6.2	16.1	17.5	16.3	500-B
	20PF	28	15	Ø19.5*6HEX*17D	12	PT1/4"19P	6.2	17.5	19	17.7	500-B
	30PF	33	15	Ø24*6HEX*21D	16.1	PT3/8"19P	6.2	31.7	34.5	32.1	500-B




Computer No	Product Sign	Dimension (mm)					Weight (g)			Quantity per Carton	
		Lp	C	Cp	A	T	Bp	SS41	BRASS		SUS
SUS A2335SAJA BRASS A0135SAJA SS41 A1135SAJA	10PM	30.9	15	Ø13.7*6HEX*12D	10	PT1/8"28P	6.2	11.9	13	12.1	500-B
	20PM	34	15	Ø19.5*6HEX*17D	13	PT1/4"19P	6.2	22.4	24.4	22.7	500-B
	30PM	34	15	Ø19.5*6HEX*17D	13	PT3/8"19P	6.2	20.2	22	20.5	500-B
	40PM	34	15	Ø24*6HEX*21D	13	PT1/2"14P	6.2	36.2	39.5	36.8	500-B



Computer No	Product Sign	Dimension (mm)					Weight (g)			Quantity per Carton	
		Lp	C	Cp	A	T	Bp	SS41	BRASS		SUS
SUS A2335SAJA BRASS A0135SAJA SS41 A1135SAJA	10PMS	31	15	Ø13.7*6HEX*12D	10	PS1/8"28P	6.2	9.6	10.5	9.7	500-B
	20PMS	31	15	Ø19.5*6HEX*17D	10	PS1/4"19P	6.2	16.5	18	16.7	500-B
	30PMS	31	15	Ø19.5*6HEX*17D	10	PS3/8"19P	6.2	17.5	19	17.7	500-B
	40PMS	34	15	Ø24*6HEX*21D	13	PS1/2"14P	6.2	32.7	35.5	33.1	500-B



Computer No	Product Sign	Dimension (mm)					Weight (g)			Quantity per Carton	
		Lp	C	Cp	A	T	Bp	SS41	BRASS		SUS
SUS A2335SAJA BRASS A0135SAJA SS41 A1135SAJA	20PP	32.5	15	Ø16*6HEX*14D	11.5	4*6	6.2	15.6	17	15.8	500-B
	25PP	34	15	Ø16*6HEX*14D	13	5*8	6.2	19.8	21.5	20	500-B
	30PP	36	15	Ø19.5*6HEX*17D	15	6.5*10	6.2	29.9	32.5	30.3	500-B



Computer No	Product Sign	Dimension (mm)					Weight (g)			Quantity per Carton	
		Lp	C	Cp	A	T	Bp	SS41	BRASS		SUS
SUS A2335SAJA BRASS A0135SAJA SS41 A1135SAJA	20PG	34.3	15	Ø19.5*6HEX*17D	13.3	7/16"20P	6.2	18.4	20	18.6	500-B
	30PG	36	15	Ø19.5*6HEX*17D	15	9/16"18P	6.2	21.1	23	21.4	500-B
	40PG	37.5	15	Ø21.7*6HEX*19D	16.5	3/4"16P	6.2	32.2	35	32.6	500-B

- Max. pressure: 10Kg/cm²
- Operating temp. range: A2335SAJA=VITON -20°C ~ +180°C
- Uses: Pneumatic pressure hose, Pneumatic tools, Air pressure machine, Automatic assembly machine.
- Brass mark: A0135SAJA
- Steel mark: A1135SAJA
- Special seal(Packing) temperature range: -50°C ~ +300°C

Dimension of T: NPT, BSP, etc. are available to produce besides PT. (Welcome to order special threads)